



AMBI RAD

Vision

Radiant Tube Heating Systems



telephone
0116 288 4333

freephone
0808 108 7575

airability.co.uk



Vision



*

Radiant Tube Heating Systems

Renowned for its pioneering track record, AmbiRad, Europe's leading supplier of radiant tube heating systems, has yet again raised the industry standard in terms of innovation and technical performance.

The range of high efficiency Vision radiant tube heaters delivers exceptional performance in terms of efficiency and the potential to reduce energy costs.

VSX models 15% more effective than standard radiant tube heaters, with payback of 6 months achievable when redeeming ECA allowances.

* Applicable to certain models only

Model Range

There are three vision ranges:

- > The high efficiency VSX range, with recuperative heat exchanger, which is available as a 'U' tube model
- > The VS range, complete with stainless steel reflectors and endcaps, is available in 'U' tube, single linear and double linear models and can be mounted in linear or U tube herringbone configurations
- > The VSA range, complete with aluminised reflectors and endcaps, which is available in 'U' tube, single linear and double linear models and can be mounted in linear or 'U' tube herringbone configurations

Features & Benefits

Features:

New advanced burner technology


- > Choice of burner ratings from 15 to 50kW
- > NO_x emissions as low as 52ppm on certain models - 40% lower than standard radiant heater
- > Combustion occurs entirely within the firing tube. Not only does this reduce the size and weight of the traditional burner control housing but it also helps to reduce noise levels (as quiet as 47 dB(A) 3m field)

- > New slim-line burner head provides a long evenly distributed flame that dramatically improves temperature distribution along the entire length of the heater, delivering a more even floor coverage
- > The inclusion of a recuperative heat exchanger on VSX models (patent P308150GB), mounted adjacent to the burner housing, significantly increases thermal efficiencies up to 90% and enhances radiant efficiency above 60%.
- > All units CE approved

Benefits:

Easy to install and maintain

- > On forced gas burner models all electrical wiring is contained at one end of the product, which is particularly time saving when installing single linear (VSLF) heater models
- > All units require straightforward annual maintenance

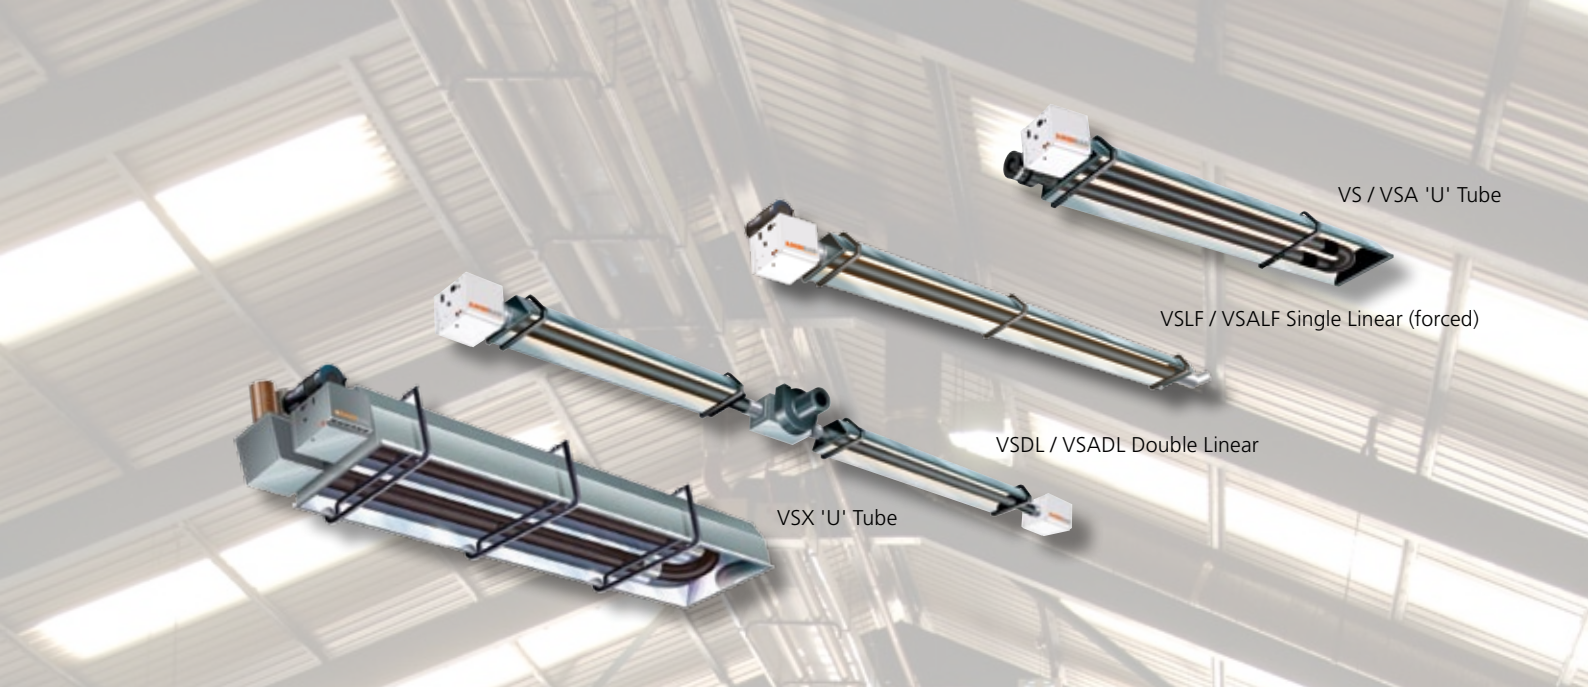

Optimum economy and fuel savings

- > The elimination of both distribution and standby losses coupled with high operational efficiencies at the point of use enable fuel savings of up to 65% compared with conventional heating systems
- > Excellent radiant performance. More of the available heat generated is distributed to floor level thereby improving efficiency and reducing energy consumption
- > High efficiency VSX35 & VSX40 are included on the Government's Energy Technology List and may be eligible for Enhanced Capital Allowances (ECA)

Additional control at the touch of a button

All models are compatible with AmbiRad SmartCom control systems. SmartCom units incorporate a host of features such as self learning optimised start-up to ensure




SmartCom³ control panel



Radiant black bulb sensor

(Please refer to separate leaflet 'SmartCom Energy Management Control' for full details)

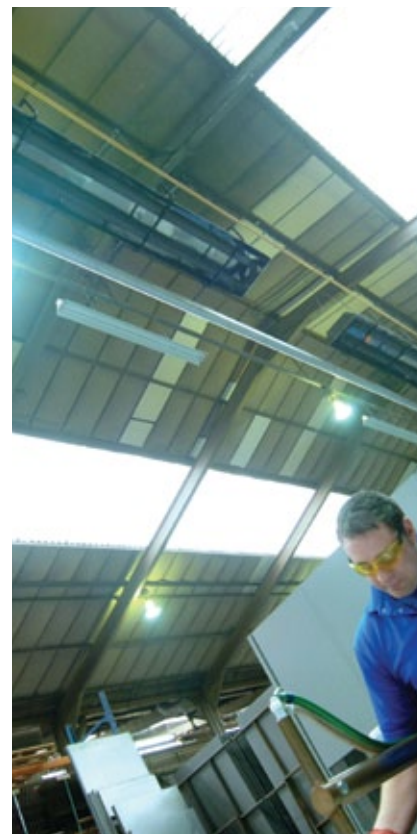


Herringbone Configuration

Herringbone systems are specifically designed to suit individual building requirements; they can incorporate up to ten 'U' tube or linear heaters on one exhaust manifold. The exhaust manifold may be terminated through the roof or wall

The particular benefits of herringbone systems are:

- > Optimised energy efficiencies
- > All units share a common internal flue thereby raising efficiency within the building

- > Uniform heat distribution within the space being heated
- > Improved aesthetics and minimal risk of water ingress - only one penetration of the building is required to enable the products of combustion to be expelled
- > Universal application - they are ideal for both new build and older premises (in particular where penetration of an asbestos roof is an issue)

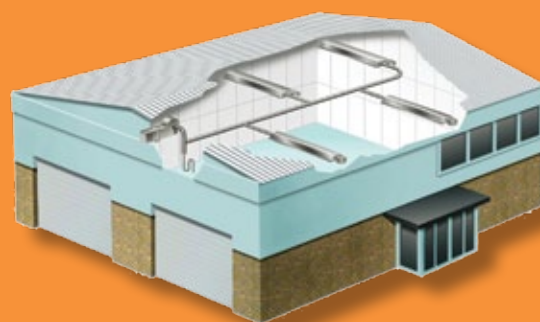

Specification

VSX model

Flueing

Units can be installed unflued or individually flued (including concentric flues to minimise building penetrations).

Fresh air intake

Fresh air can be ducted into the heat exchanger from outside the building to provide clean combustion air, required when there are contaminants in the atmosphere

Burner

Burner ratings range between 20 and 50kW in 5kW increments. The new burner head located within the firing tube leg provides a very long flame with even heat distribution. NO_x emissions are very low - as low as 52ppm on certain models.

Heat Exchanger


Mounted adjacent to the burner housing. Significantly increases thermal efficiencies up to 90% and enhances radiant efficiency above 62.5%.

Control housing


Burner controls are mounted within a chassis that incorporates hinged doors for ease of access for commissioning and maintenance.

Tube finish


CALCOAT® tubes – a high technology process that applies a tough, dense, highly emissive surface both inside and out that eliminates the need for painting. As a result CALCOAT® ensures a long lasting surface that will not rust or flake, protects welds and maintains the highest of emissivity factors throughout the entire life of the heater.

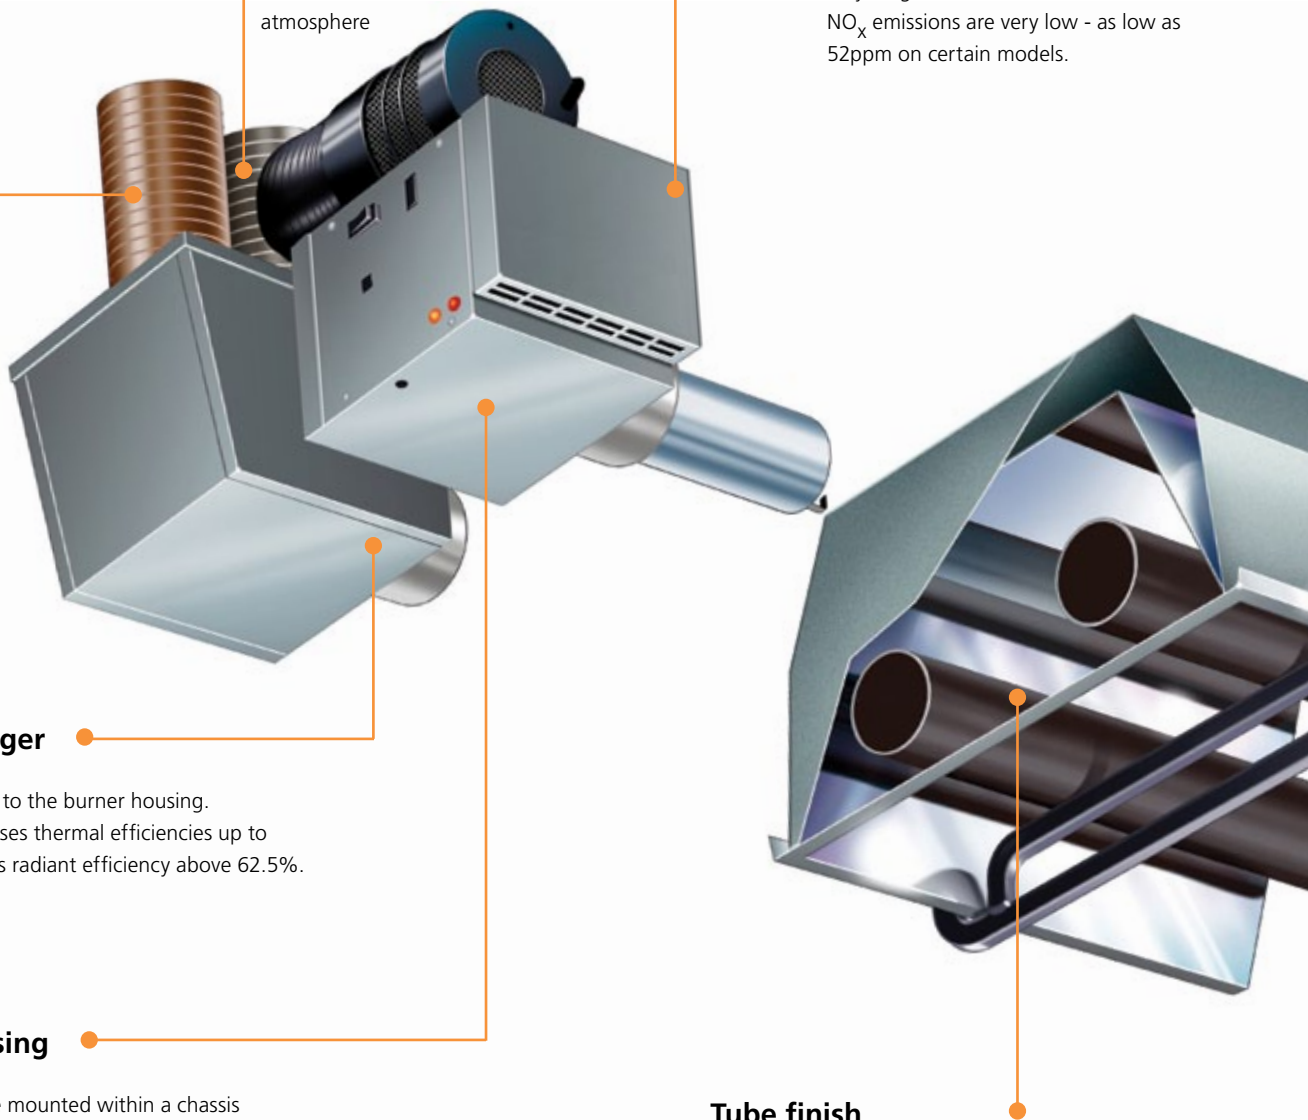


Standard radiant heater

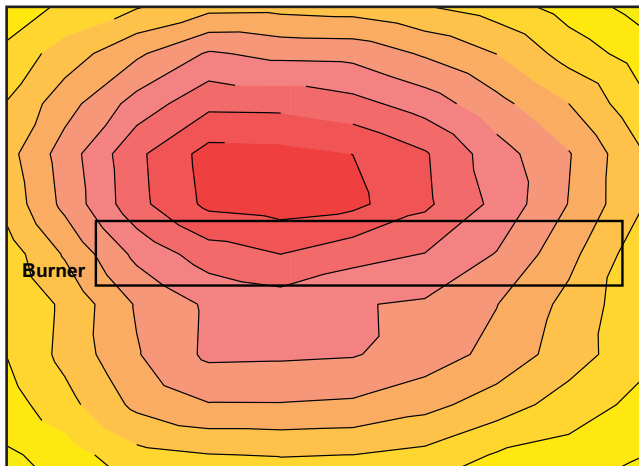

Vision (VSX)

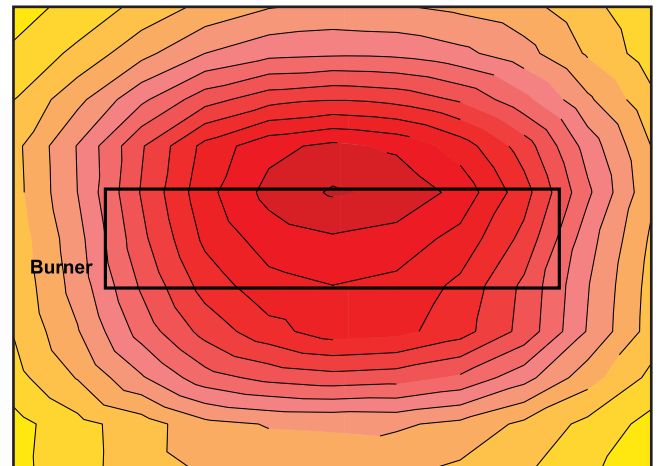

Vision improves temperature distribution along the entire length of the heater.

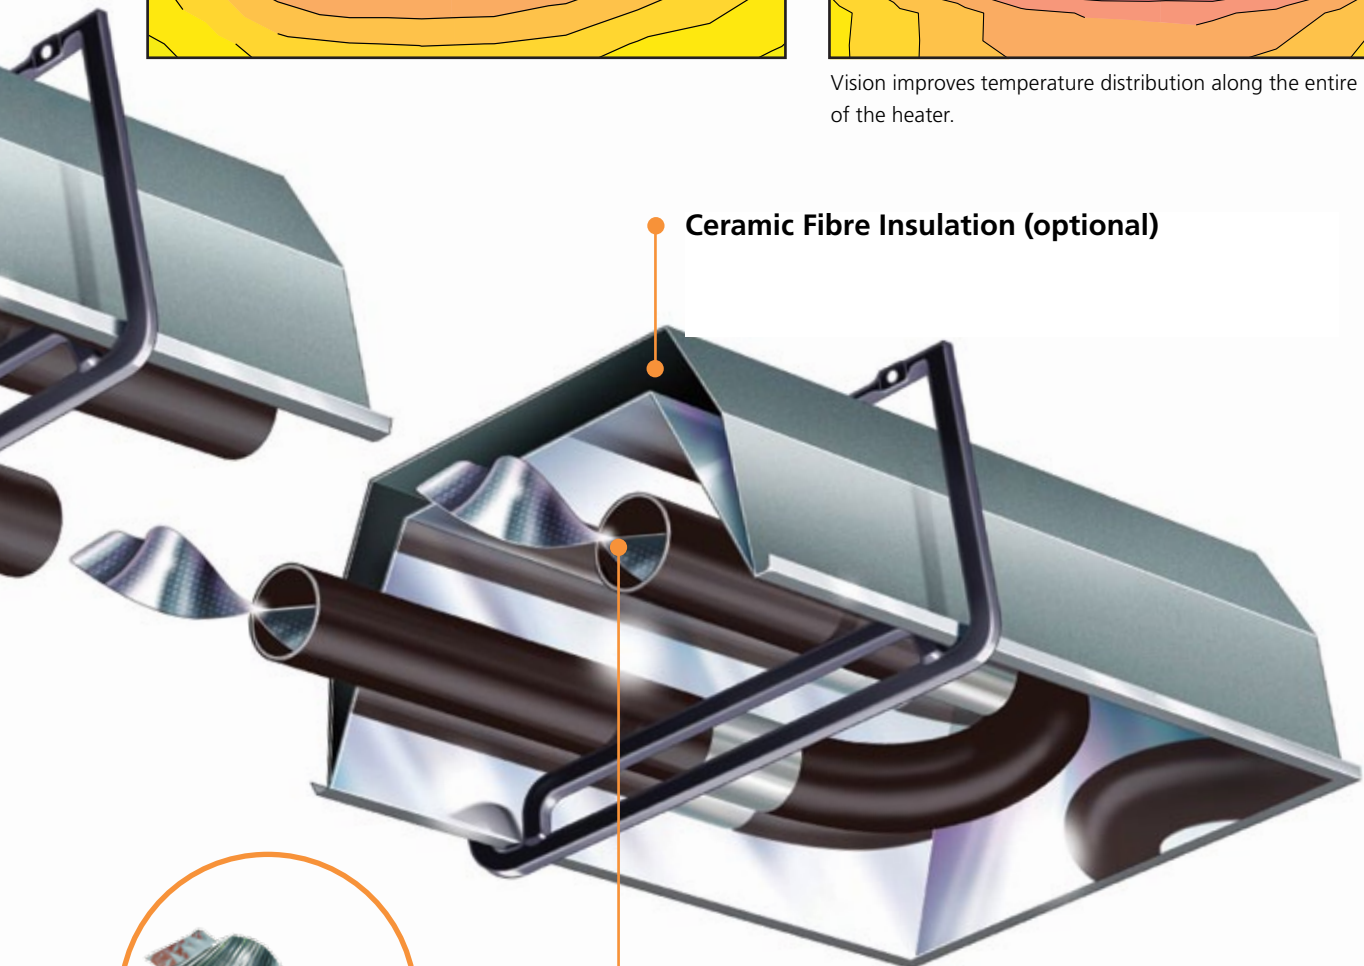

Ceramic Fibre Insulation (optional)

Turbulators

Stainless steel spiral turbulators optimise tube temperatures by 'scrubbing' the flue gases against the tube surface, maximising heat transfer and increasing radiant efficiency.



Radiant Heating

Working in the same way as the sun, radiant heat warms all solid objects and surfaces in its path through electromagnetic waves. Being mounted overhead, AmbiRad radiant heaters produce infrared heat that is directed downwards to low level by a reflector.

Infrared energy passes inertly through the air, dissipating as heat upon contact with people and surfaces thus creating a comfortable, all-round radiant warmth at lower air temperature. This reduces wasteful heating of empty space and makes substantial energy savings over conventional boiler and air systems.

Universal Application

Radiant heating has traditionally been predominant in industrial and commercial buildings, especially where there are large, high bay areas or where there are a high number of air changes within the environment.

Vision has been developed with these markets in mind and with a view to making radiant heating truly competitive within new smaller industrial and commercial buildings.

Its application is universal including environments with high air change, frequently opened doors, or where there is a need for zonal heating in very large premises.

The highly efficient performance of Vision provides greatly reduced running costs and improved capital payback, setting new industry standards.

Vision Applications

- > Aircraft hangars
- > Automotive workshops and showrooms
- > Factories
- > Retail outlets
- > Sports arenas and halls
- > Warehouses
- > Workshops

Enhanced Capital Allowances

The Government's Enhanced Capital Allowance scheme actively encourages industry and commerce to reduce energy consumption by promoting the use of energy efficient equipment. With radiant efficiencies of above 62.5% and thermal efficiencies of up to 91% (reducing fossil fuel consumption) a significant number of Vision models are included on the list.



This symbol verifies that the product has been independently assessed and qualifies for the ECA scheme, an upfront tax relief enabling businesses that invest in energy-saving equipment to claim 100% first-year capital allowances against their taxable profits.



| | |
|-----------------------------------|---|
| Gas supply | Connection 1/2 BSP internal thread |
| Electrical supply | 230 volt 1 phase 50Hz |
| Current rating | 1.0 amp max (inductive) |
| External fuse rating | 3 amp external |
| Ignition | Electronic programme start up with spark ignition |
| Exhaust flue - twin wall diameter | 127 mm (5") |

Note: All technical details shown relate to VSUT & VSAUT models except for clearance distances as indicated.

| Model | | VS15UT4 | VS15UT | VS20UT | VS25UT | VS30UT | VS35UT | VS40UT | VS45UT | VS50UT |
|-----------------------------|------|---------|--------|--------|--------|--------|--------|--------|--------|--------|
| Nominal gross heat input | kW | 15.8 | 15.0 | 19.5 | 23.5 | 29.5 | 36.0 | 40.0 | 44.0 | 48.0 |
| Nominal gas rate per burner | m³/h | 1.5 | 1.4 | 1.9 | 2.3 | 2.8 | 3.4 | 3.8 | 4.2 | 4.6 |

| | | | | | | | | | | |
|------------------------|----|------|------|------|------|------|------|------|------|------|
| Length | mm | 2219 | 3417 | 4142 | 5066 | 6029 | 5709 | 5709 | 7471 | 7471 |
| Overall height | mm | 235 | 168 | 168 | 168 | 168 | 235 | 235 | 235 | 235 |
| Overall width | mm | 675 | 500 | 500 | 500 | 500 | 675 | 675 | 675 | 675 |
| Total installed weight | kg | 41 | 43 | 43 | 60 | 70 | 92 | 92 | 121 | 121 |

For mounting heights above or below those specified contact AmbiRad design office

| | | | | | | | | | | |
|-------------------------|---|------------|------------|----------|--------|----------|------------|-----------|----------|-----------|
| Horizontal | m | 4 to 5 | 4 to 5 | 4.5 to 7 | 5 to 8 | 5.5 to 9 | 6 to 10 | 6.5 to 11 | 7 to 12 | 7.5 to 13 |
| Inclined / wall mounted | m | 3.5 to 4.5 | 3.5 to 4.5 | 3.5 to 5 | 4 to 5 | 4 to 6 | 4.5 to 6.5 | 5 to 7 | 5.5 to 8 | 6 to 9 |

| Model | | VS15UT4 | VS15UT | VS20UT | VS25UT | VS30UT | VS35UT | VS40UT | VS45UT | VS50UT |
|---|----|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Above reflector VS models with end caps | mm | All models 180 | | | | | | | | |
| Above burner & fan assembly flued | mm | All models 500 | | | | | | | | |
| Beneath tubes | mm | 1500 | | | 1700 | | | 2100 | | |
| To the sides | mm | 900 | | | 1000 | | | 1100 | | |
| Horizontally from fan outlet unflued | mm | All models 1200 | | | | | | | | |
| End of the heater to the wall | mm | All models 500 | | | | | | | | |

| Technical Data | | | | | | | | |
|-----------------------------|------|---------|---------|---------|---------|---------|---------|---------|
| Model | | VSX20UT | VSX25UT | VSX30UT | VSX35UT | VSX40UT | VSX45UT | VSX50UT |
| Nominal gross heat input | kW | 20.0 | 25.0 | 32.0 | 36.0 | 40.0 | 44.0 | 49.5 |
| Nominal gas rate per burner | m³/h | 1.9 | 2.4 | 3.1 | 3.4 | 3.8 | 4.2 | 4.7 |

| | | | | |
|------------------------|----|----------------|------|------|
| Length | mm | 4047 | 5927 | 7692 |
| Overall height | mm | All models 450 | | |
| Overall width | mm | All models 746 | | |
| Total installed weight | kg | 114 | 158 | 205 |

For mounting heights above or below those specified contact AmbiRad design office

| | | | | | | | | |
|-------------------------|---|----------|--------|----------|------------|-----------|----------|-----------|
| Horizontal | m | 4.5 to 7 | 5 to 8 | 5.5 to 9 | 6 to 10 | 6.5 to 11 | 7 to 12 | 7.5 to 13 |
| Inclined / wall mounted | m | 3.5 to 5 | 4 to 5 | 4 to 6 | 4.5 to 6.5 | 5 to 7 | 5.5 to 8 | 6 to 9 |

| | | | |
|---|----|-----------------|------|
| Above reflector | mm | All models 100 | |
| Above burner & heat exchanger assembly | mm | All models 500 | |
| Beneath tubes | mm | 2300 | 2500 |
| To the sides | mm | All models 1300 | |
| Horizontally from heat exchanger outlet unflued | mm | All models 1200 | |
| End of the heater to the wall | mm | All models 700 | |

Vision Linear Models (forced burner) VSLF & VSALF

Note: All technical details shown relate to VSLF & VSALF models except for clearance distances as indicated.

| Technical Data | | | | | | | | | |
|---|----------------|-----------------|--------|--------|--------|---------|---------|---------|---------|
| Model | | VS15LF | VS20LF | VS25LF | VS30LF | VS35LF | VS40LF | VS45LF | VS50LF |
| Nominal gross heat input | kW | 13.8 | 19.5 | 23.5 | 29.5 | 36.5 | 40.0 | 45.0 | 50.0 |
| Nominal gas rate per burner | m³/h | 1.3 | 1.9 | 2.3 | 2.8 | 3.5 | 3.8 | 4.3 | 4.8 |
| Dimensional & weight data | | | | | | | | | |
| Standard length option | Nominal metres | 6 | 7 | 8 | 10.5 | 10.5 | 13.5 | 13.5 | 13.5 |
| Total installed standard length weight option | kg | 43 | 49 | 53 | 72 | 103 | 126 | 126 | 126 |
| Extended length option | Nominal metres | 8 | 10.5 | 10.5 | 12.5 | 13.5 | 16 | 16 | 16 |
| Total installed extended length weight option | kg | 53 | 72 | 72 | 84 | 126 | 147 | 147 | 147 |
| Overall height | mm | 174 | | | | 235 | | | |
| Overall Width | mm | 304 | | | | 470 | | | |
| Recommended mounting height range For mounting heights above or below those specified contact AmbiRad design office | | | | | | | | | |
| Horizontal | m | 4 to 5 | 5 to 7 | 5 to 7 | 5 to 9 | 5 to 11 | 5 to 11 | 6 to 12 | 7 to 13 |
| Inclined / wall mounted | m | 3.5 to 4.5 | 4 to 5 | 4 to 5 | 4 to 6 | 4 to 7 | 4 to 7 | 5 to 8 | 6 to 9 |
| Minimum Clearance Distance To Combustible Surfaces | | | | | | | | | |
| Above reflector VSLF models with end caps | mm | All models 150 | | | | | | | |
| Above reflector VSLF models no end caps | mm | All models 280 | | | | | | | |
| Above burner | mm | All models 500 | | | | | | | |
| Beneath tubes | mm | 1500 | | 1700 | | 2100 | | | |
| To the sides | mm | All models 750 | | | | | | | |
| Horizontally from heater outlet unflued | mm | All models 1200 | | | | | | | |
| End of the heater to the wall | mm | All models 500 | | | | | | | |

Vision Linear Tube Models (induced burner) VSLI & VSALI

Note: For all dimensional, weight and clearance details please refer to Vision Linear forced burner section detailed above

| Technical Data | | | | | | | | | |
|-----------------------------|-------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Model | | VS15LI | VS20LI | VS25LI | VS30LI | VS35LI | VS40LI | VS45LI | VS50LI |
| Nominal gross heat input | kW | 15.0 | 19.5 | 23.5 | 29.5 | 36.0 | 40.0 | 44.0 | 50.0 |
| Nominal gas rate per burner | m ³ /h | 1.4 | 1.9 | 2.3 | 2.8 | 3.4 | 3.8 | 4.2 | 4.8 |

Vision Standard Double Linear Models (induced burner) VSDL & VSADL

Note: For clearance details please refer to Vision Linear forced burner section detailed above

| Technical Data | | | | | | | | | |
|---|-------------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Model | | VS15DL | VS20DL | VS25DL | VS30DL | VS35DL | VS40DL | VS45DL | VS50DL |
| Total nominal gross heat input both burners | kW | 30.0 | 39.0 | 47.0 | 59.0 | 72.0 | 80.0 | 88.0 | 100.0 |
| Total nominal gas rate both burners | m ³ /h | 2.8 | 3.8 | 4.6 | 5.6 | 6.8 | 7.6 | 8.4 | 9.6 |
| Dimensional & weight data | | | | | | | | | |
| Standard length option | Nominal metres | 12 | 14 | 16 | 21 | 21 | 27 | 27 | 27 |
| Total installed standard length weight option | kg | 86 | 98 | 106 | 144 | 206 | 252 | 252 | 252 |
| Extended length option | Nominal metres | 16 | 21 | 21 | 25 | 27 | 32 | 32 | 32 |
| Total installed extended length weight option | kg | 106 | 144 | 144 | 168 | 252 | 294 | 294 | 294 |

Document reference number: GB/VS/19/0613



44 Westley Grange, West Avenue
Wigston, Leicestershire LE18 2FB

Tel: 0116 288 4333
Fax: 0116 288 1444

info@airability.co.uk
www.airability.co.uk

Air Ability Limited. Registered in England No. 6065045



AmbiRad UK is a registered trademark of AmbiRad Limited. Because of continuous product innovation, AmbiRad reserves the right to change product specification without due notice.